



WI-FI SMART SOCKET 3.0 SET UP INSTRUCTIONS

AP Mode - Alternative Set Up

Use this method when working with older routers that have one Wi-Fi network name. Some older routers with one Wi-Fi network name will not be able to recognize a 2.4 GHz device.


Technical Requirements

Must have consistent 2.4 GHz Wi-Fi signal at the installation location with dBm strength of -70 or better.


1. Download/open the Brilliance Smart app.




In your phone's settings, **make sure Bluetooth is turned off.**

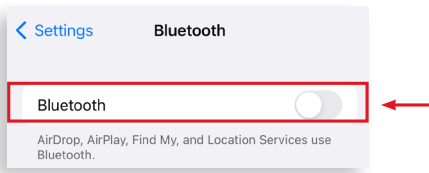


2. On the home screen, tap the **Add** button at the upper-right corner.

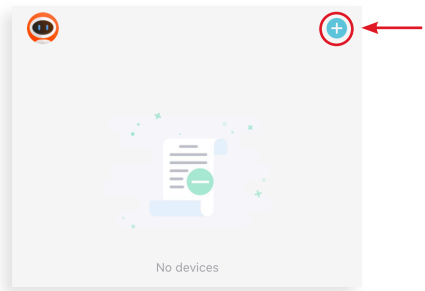


3. On the Add Manually screen, tap **Smart Socket** on the left menu and then tap **Smart Socket** in the main window.

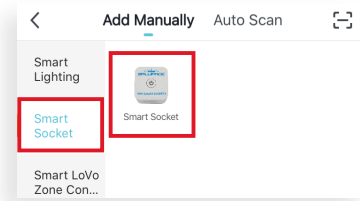

4. Enter your 2.4 GHz Wi-Fi network name and password, and then tap **Next**.

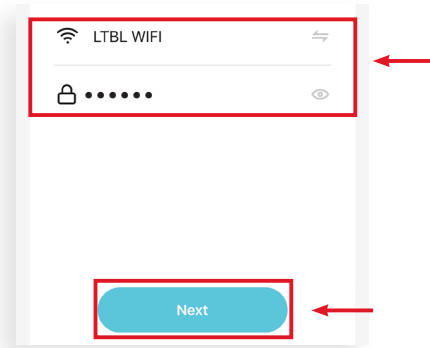

5. On the Reset screen, tap **EZ Mode** in the upper-right corner and then tap **AP Mode**.

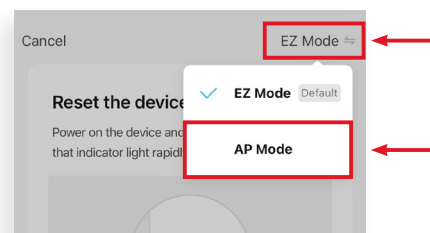

AP Mode Set Up continues on the next page

AP Mode Set Up - Continued


- 6. Now you can reset the device. Hold the power button down for 5 seconds.

The lights in the power button of the Smart Socket 3.0 will begin to flash slowly to indicate the device is in AP Mode.


To continue, tap **Confirm indicator slowly blink** and then tap **Next**.



- 7. The next screen will take you to the device's general settings once you tap **Go to Connect**.

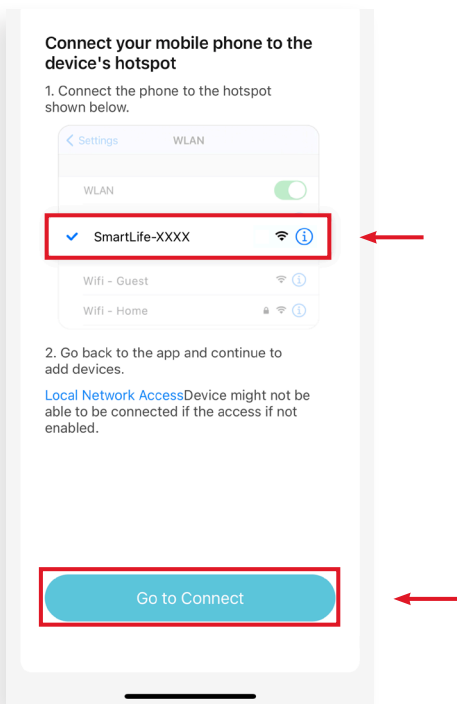

- 8. Go to your Wi-Fi networks, scroll and tap the network with **SmartLife** in the name.

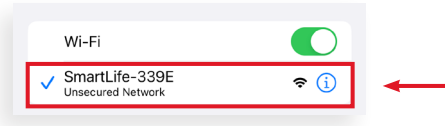

- 9. Once the Smart Life network is connected, re-open the Brilliance Smart app.

The Connection screen shows the Smart Socket loading. It can take up to 2 minutes to populate.

After the Smart Socket has connected, AP Mode Set Up is complete and you can further program the device.

