



# WI-FI SMART SOCKET 3.0 SET UP INSTRUCTIONS

## Quick Mode: Set Up Multiple Devices

Use this method to **set up one or more** Smart Socket 3.0 devices at the same time on the Brilliance Smart app with a 2.4GHz Wi-Fi network.


## Technical Requirements

Must have consistent 2.4 GHz Wi-Fi signal at the installation location with dBm strength of -70 or better.


1. Download/open the Brilliance Smart app.




On the home screen, tap the **Add** button at the upper-right corner.

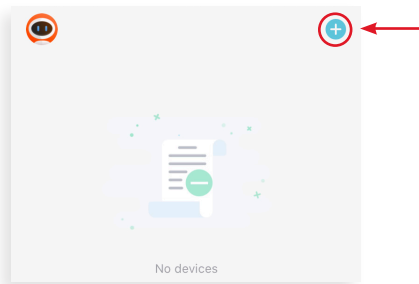


2. The **Add Manually** tab is displayed and the Bluetooth begins looking for a new device. If the device(s) populate, tap **Do not add**.

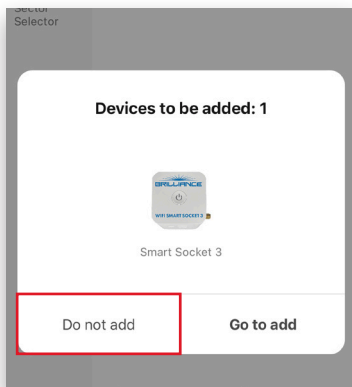

3. On the Add Manually screen, tap **Smart Socket** on the left menu and then tap **Smart Socket** in the main window.

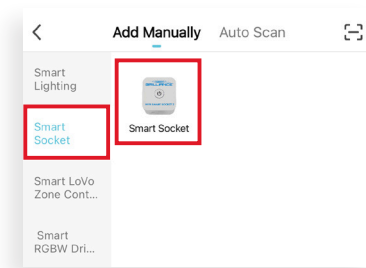


4. Enter your 2.4 GHz Wi-Fi network name and password, and then tap **Next**.

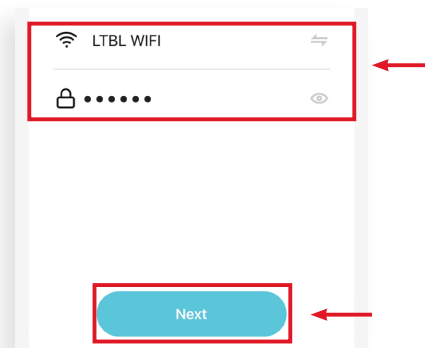


*Quick Mode Set Up continues on the next page*

# Set Up Multiple Devices, Continued


5. Once all devices populate, tap **Add All** in the upper-right corner.

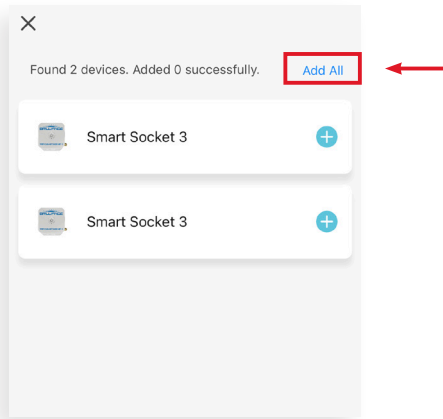


6. Re-enter your 2.4 GHz Wi-Fi network name and password, and then tap **Next**.

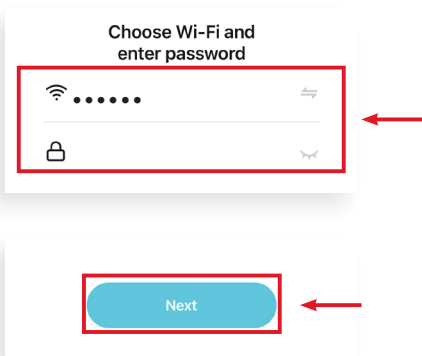


7. The Smart Socket 3 devices will automatically start connecting to the app.

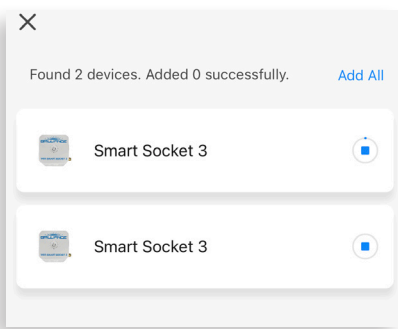

8. When all devices are connected, tap the **Next** button at the bottom of the screen.

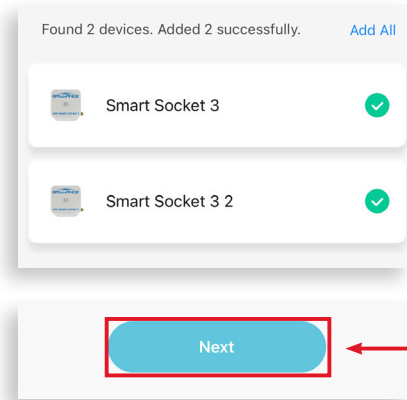


8. When the devices are connected, the Added screen is displayed. Tap the **Pencil icon** to rename each device.

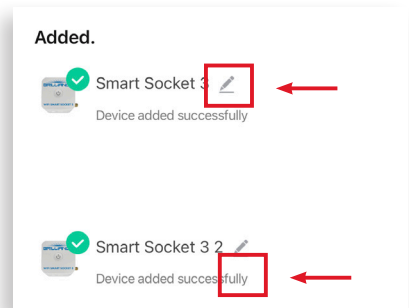

7. The Smart Socket 3 devices will automatically start connecting to the app.

5. Once all devices are named, tap **Done** in the upper-right corner.

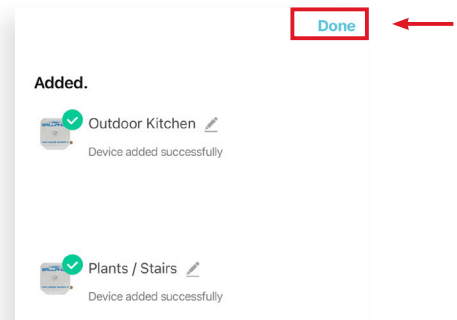

**NOTE:** If Quick Mode Set Up does not connect, use the AP Mode Set Up instructions.