TEE WALL WASHER

MADE IN AMERICA

DESCRIPTION

The Tee Wall Washer Light features the Brilliance Metal Works adjustment system which allows articulation of the knuckle. For ease of installation, the power cable comes zip tied to the ground stake. Dimmable with Brilliance Dimmer and most magnetic transformers. Light source UL Certified E511083.

TEE WALL WASHER	
Use	**Up Lighting/Back Lighting & Grazing** **Low Profile Pathway Lighting**
Finish	**Brass, Copper, or Brass w/ Black Ceramic Coated**
Includes	**LightingShrink Professional Crimp, Heat Shrink Cable Connector, and 30 in. Lead**
Warranty	**Lifetime Warranty on Tee Wall Washer Fixtures**
Integrated Lamp	**Small Light Bar - 1.5W, 2700K, 110 Lumens, CRI 85, IP65, 8-15VAC, 1.67VA, 5 year warranty** TEE-WALL-WASHER-2700-COPPER TEE-WALL-WASHER-2700-BRASS TEE-WALL-WASHER-2700-BRASS-BLK
	Small Light Bar - 1.5W, 3000K, 110 Lumens, CRI 85, IP65, 8-15VAC, 1.67VA, 5 year warranty TEE-WALL-WASHER-3000-COPPER TEE-WALL-WASHER-3000-BRASS TEE-WALL-WASHER-3000-BRASS-BLK

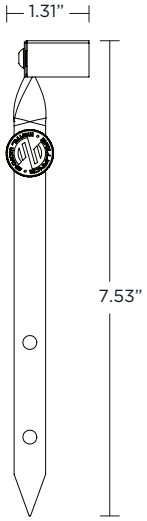

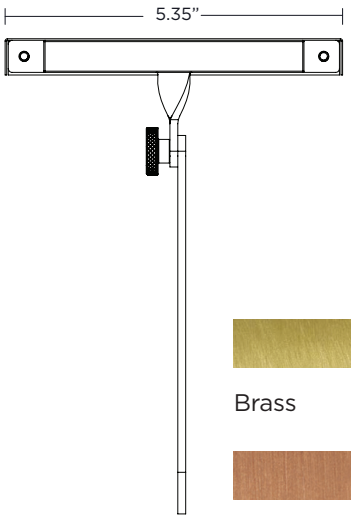

Brass

Copper

Brass+ Black Ceramic Coated

Weathered Brass (WB)

INSTALLING THE FIXTURE

1. **Dig a hole in the ground approximately 1” wide by 4” deep.**
2. **Insert the built-in stake into the hole and aim the fixture in the preferred direction and angle.**
3. **For soft soil, gently push the stake into the ground.**
4. **Lay the power cable from the fixture into the existing cable trench and use the LightingShrink cable connector to join the fixture cable to the main cable.**