
# LEGACY MR16

## DESCRIPTION

The Brilliance LED Legacy MR16 delivers reliable performance and precise, consistent beam control with fixed optics in 15°, 30°, 60°, and 120° beam spreads. The 8W lamp brings an intense 800-lumen output for localized illumination, making it ideal for applications that require focused, high-output lighting. Available in 2W, 4W, 5W, and 8W options with 2700K, 3000K, and 5700K color temperatures, it offers 90+ CRI, 8–25V AC/DC compatibility, and an IP61 rating for damp locations. Ideal for applications where a fixed beam spread is preferred, the Legacy MR16 provides dependable performance backed by a three-year warranty.

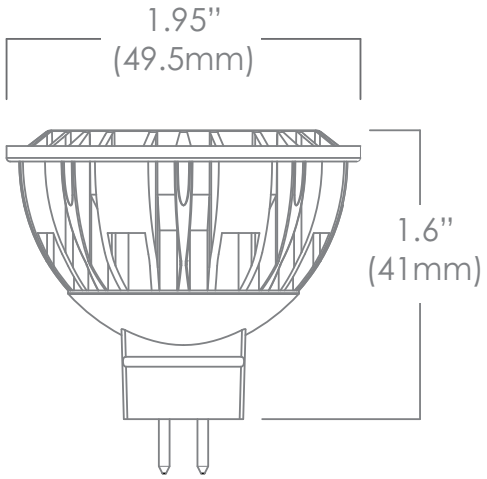


## LEGACY MR16 FEATURES

- 800-Lumen Output
- Wattages: 2W, 4W, 5W, and 8W
- Beam Spreads: 15°, 30°, 60°, and 120° fixed optics
- Kelvin Options: 2700K, 3000K, and 5700K
- Operating Range: 8–25V, compatible with AC/DC
- CRI: 90+ for excellent color rendering
- IP61 Rating: Suitable for damp locations and for use in totally enclosed luminaires
- Warranty: Three-year manufacturer's warranty

Part Number: **MR16-LEGACY-X-XXXX-XX**

Wattage | Kelvin | Beam spread



## LEGACY MR16 SPECS

| | | | | | |
|---|---|---|---|---|---|
| **Wattage** | | **2W** | **4W** | **5W** | **8W** |
| **Volt Amps** | | 2.3 | 4.8 | 5.4 | 9.3 |
| **Lumens** | **2700K** | 180 | 330 | 500 | 800 |
| | **3000K** | 185 | 340 | 515 | 820 |
| | **5700K** | 195 | 360 | 545 | 870 |
| **Beam Spread** | | **15°, 30°, 60°, 120°** | | | |
| **Kelvin Temperature** | | **2700K, 3000K, 5700K** | | | |
| **Operating Range** | | **8-25 VAC/DC** | | | |
| **Replaces** | | **10W, 20W, 35W, 50W Halogen** | | | |
| **CRI** | | **>90** | | | |
| **Power Factor** | | **.92** | | | |
| **IP** | | **61** | | | |
| **Lamp Life (hours)** | | **35,000** | | | |
| **Warranty (years)** | | **3** | | | |